

Examples for the qTable function

Enrico Schumann

es@enricoschumann.net

We attach the package and create some random data.

```
> require("NMOF")
> x <- rnorm(100L, mean = 0, sd = 1.5)
> y <- rnorm(100L, mean = 1, sd = 1)
> z <- rnorm(100L, mean = 1, sd = 0.5)
> X <- cbind(x, y, z)
> summary(X)
```

```
      x              y              z
Min.   :-3.668   Min.   :-1.591   Min.   :-0.168
1st Qu.:-1.303   1st Qu.: 0.177   1st Qu.: 0.723
Median :-0.189   Median : 0.964   Median : 1.008
[ reached getOption("max.print") -- omitted 3 rows ]
```

A call to qTable could like this, and it will result in the \LaTeX output below.

```
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
             circlesize = 0.0125, xmin = -10, xmax = 10, dec = 2))
  median  min  max
x  -0.19 -3.67 4.76   — • —
y   0.96 -1.59 3.81   — • —
z   1.01 -0.17 2.39   — • —
-10   -5   0   5  10
```

If you use Sweave, use `<<results=tex>>=` to start a code chunk.

Examples

```
> ## with limits
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
           circlesize = 0.0125, xmin = -10, xmax = 10, dec = 2))
```

	median	min	max
x	-0.19	-3.67	4.76
y	0.96	-1.59	3.81
z	1.01	-0.17	2.39

```
> ## without specified limits
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
           circlesize = 0.0125, dec = 2))
```

	median	min	max
x	-0.19	-3.67	4.76
y	0.96	-1.59	3.81
z	1.01	-0.17	2.39

```
> ## 3 digits
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
           circlesize = 0.0125, dec = 3))
```

	median	min	max
x	-0.189	-3.668	4.761
y	0.964	-1.591	3.811
z	1.008	-0.168	2.386

```
> ## specific labels, but no limits
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
           labels = c(-8,2,8), at = c(-8,2,8),
           circlesize = 0.0125, dec = 1))
```

	median	min	max
x	-0.2	-3.7	4.8
y	1.0	-1.6	3.8
z	1.0	-0.2	2.4


```
> ## specific labels and limits, linethickness
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
           labels = c("a","b","c"), at = c(-8,2,8),
           circlesize = 0.02, dec = 1, linethickness = "0.2ex",
           xmin = -10, xmax = 10))
```

	median	min	max
x	-0.2	-3.7	4.8
y	1.0	-1.6	3.8
z	1.0	-0.2	2.4

```

> ## specific labels and limits, linethickness
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
  labels = c("a","b","c"), at = c(-8,2,8),
  circlesize = 0.02, dec = 1, linethickness = "0.2ex",
  xmin = -10, xmax = 10))


```

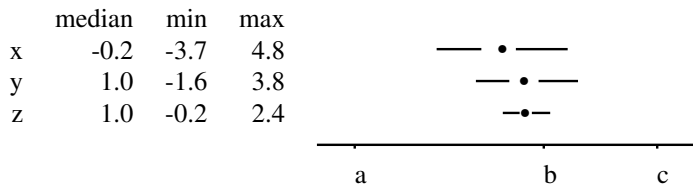

```

> ## with limits and alternative functions
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
  circlesize = 0.0125, xmin = -10, xmax = 10, dec = 2,
  funs = list(average = mean,
    `10th Q.` = function(x) quantile(x, 0.1),
    `90th Q.` = function(x) quantile(x, 0.9))))

```

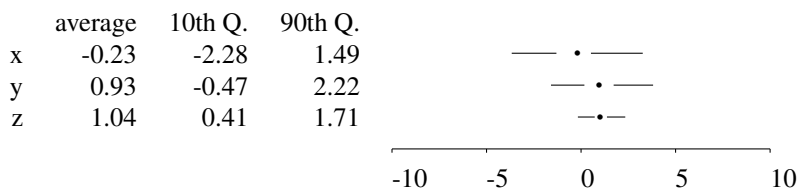

```

> ## with limits and without summary stats
> cat(qTable(X, yoffset = -0.025, unitlength = "5cm",
  circlesize = 0.0125, xmin = -10, xmax = 10, dec = 2,
  funs = list()))

```

